

Strain Gage-Based Extensometer

Model 182



High Performance Strain Gage-Based Sensor for Safety Applications

FEATURES

- Strain gage-based sensor
- Redundant option available for enhanced safety
- EDOC coated alloy steel for superior corrosion resistance
- EN15000 - EN138G9 PLd capable
- Output options:
 - mV/V, 4–20 mA, or 0–10 V
 - CAN Open or J1939 with M12 or DT connectors

APPLICATIONS


- Off-highway or agricultural vehicles
- Lifting machinery and telescopic handlers



Strain Gage-Based Extensometer

The Model 182 extensometer is a high performance strain gage-based force sensor, which is designed to measure the deformation of any solid structural body. The IP67 rated device offers great structural monitoring capabilities for many possible applications. The model supports mV/V, 4–20 mA or 0–10 V outputs as a standard.

On the safety application aspect, the Model 182 extensometer is the ideal sensor to have on any given vehicle machinery, providing chassis safety monitoring under various lifting or loading scenario. Complying with the most stringent industry standards EN15000 /EN280 it supports users either with a CAN Open or SAE J1939 protocol, with further choice of a DT or M12 connector.

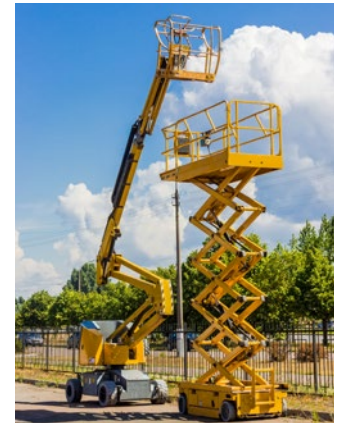

Parameter	Specification
Equivalent Rated Load	120 kg
Equivalent Output (Generic)	mV/V, 4–20 mA or 0–10 V
Equivalent Output (Safety)	CAN Open, J1939
Temperature Range, Compensated	–10°C to +80°C
Cable Length	0.2, 0.5, 1.0 m
Operating Temperature Range	–40°C to +90°C
Construction	Coated alloy steel sensor, stainless steel electronic housing, RTV potting
Environmental Protection	IP67

At VPG Transducers, we understand that each application can be unique or special.

Please contact our in-house Custom Solutions team to engage our services towards meeting your specific requirements:

vpgt.customsolutions@vpgsensors.com

DISCLAIMER: ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE. Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product. The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein. VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.** Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at vpgsensors.com. No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG. The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications. Product names and markings noted herein may be trademarks of their respective owners.